

AWNINGS

Keeping the sun from beating down on your windows in summer not only reduces the heat inside but also helps save you money on cooling costs and in winter, Awnings can help retain heat.


Apollo's range of durable Awnings can handle the elements and our extensive range of designer colours and patterns add a whole new dimension to your outdoor aesthetics. You can choose from canvas, acrylics, polyester, screen fabrics, PVC and colourbond steel.

With many different styles, Apollo has an Awning to suit almost every application.




Call us 132 899 Visit apolloblinds.com.au

AUTOMATIC LOCK ARM

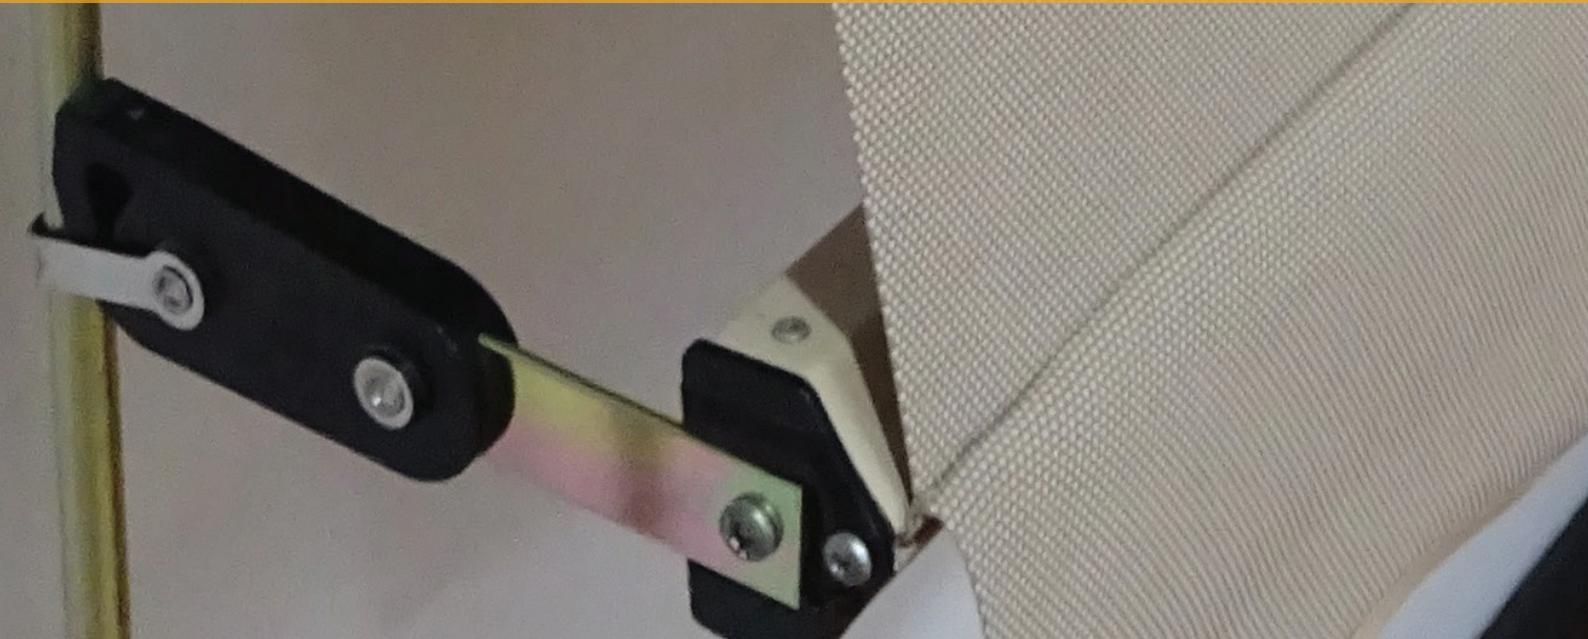


- Keep your home cooler in summer
- Hoods & five sided bottom rail colours
- Gold passivated arms & guides standard (superior to galvanising)
- Optional stainless steel guides & arms available (Additional charge)
- Auto lock in, when the arms are released in a 90° position
- Scalloped, straight or no valance options
- Ground floor applications, narrow walkways:
Awning can be close to window as possible
- Arm sizes available 150mm, 300mm, 450mm, 600mm. 300mm is the most popular arm size giving good sun & heat protection. The 150mm is ideal where the awning is on a walkway giving less chance of someone walking into the arm
- Operated by hand from outside, resists high winds
- Not recommended for cladded, fibro walls or second storey applications
- Available in Canvas, Acrylic, Mesh

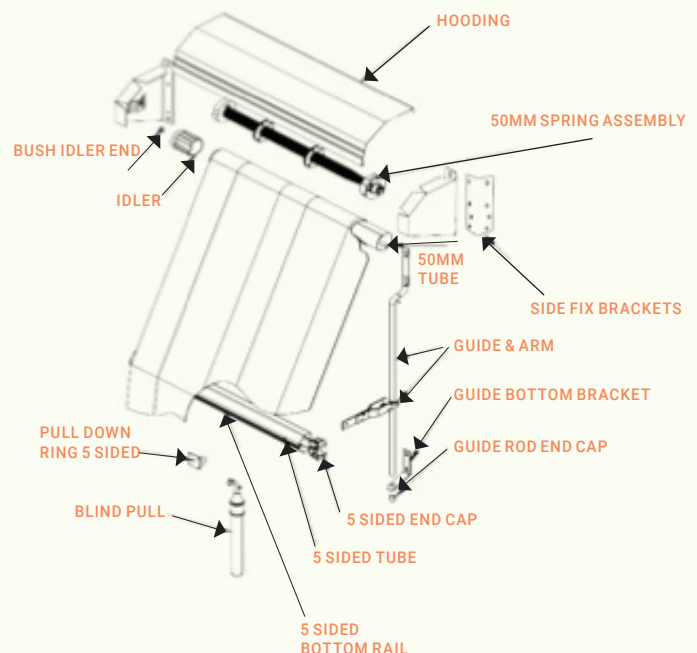


FLEXI FIT

AUTOMATIC LOCK ARM

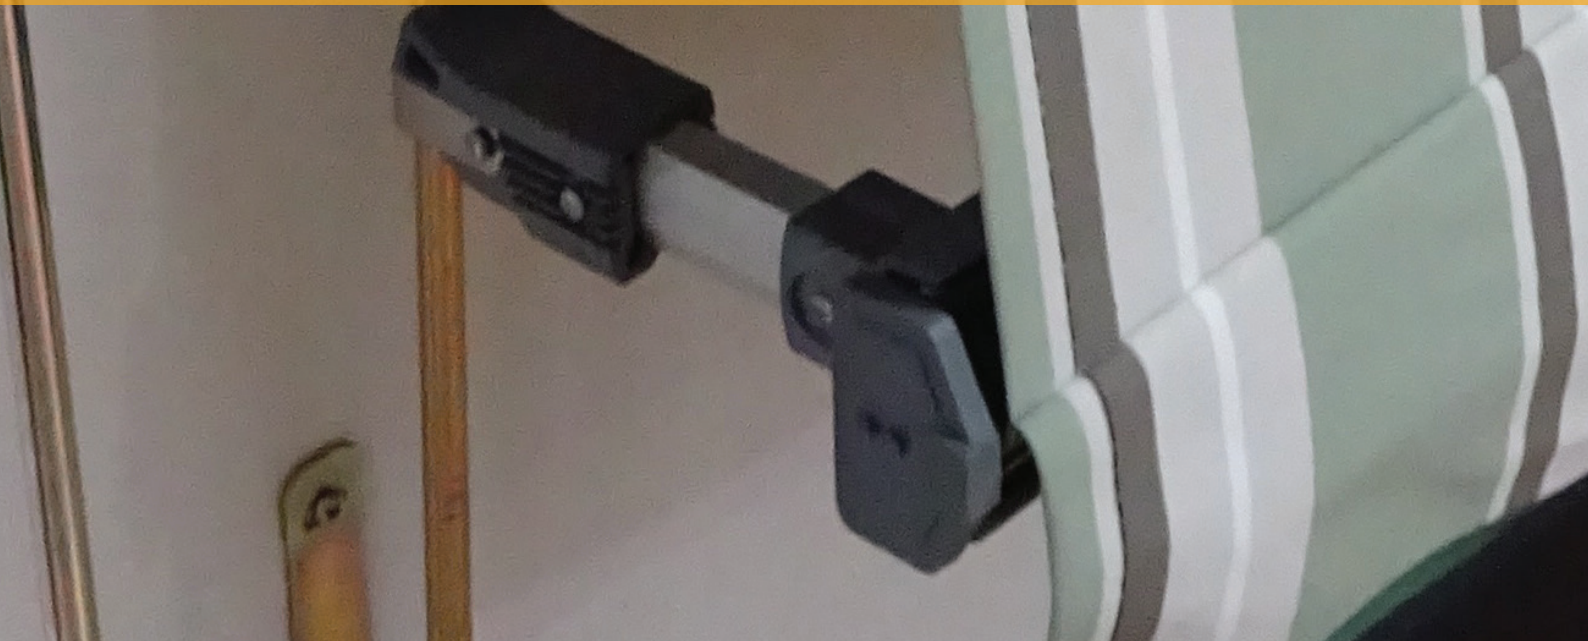


- Operated by hand from outside, resists high winds
- Scalloped, straight or no valance options
- A three-sided head box allows mounting brackets to be positioned anywhere along the width, instead of at the end of the awning (Recommended for cladded & fibro walls)
- Arm sizes available 150mm, 300mm, 450mm, 600mm 750mm, 900mm, 1200mm. 300mm is the most popular arm size giving good sun & heat protection. The 150mm is ideal where the awning is on a walkway giving less chance of someone walking into the arm
- Auto lock in, when the arms are released in a 90° position.
- Ground floor applications, narrow walkways: Awning be as close to window as possible
- Similar to standard Automatic Lock Arms but with aluminium arms (Positioned on the bottom rail where required)
- Available in Canvas, Acrylic, Mesh

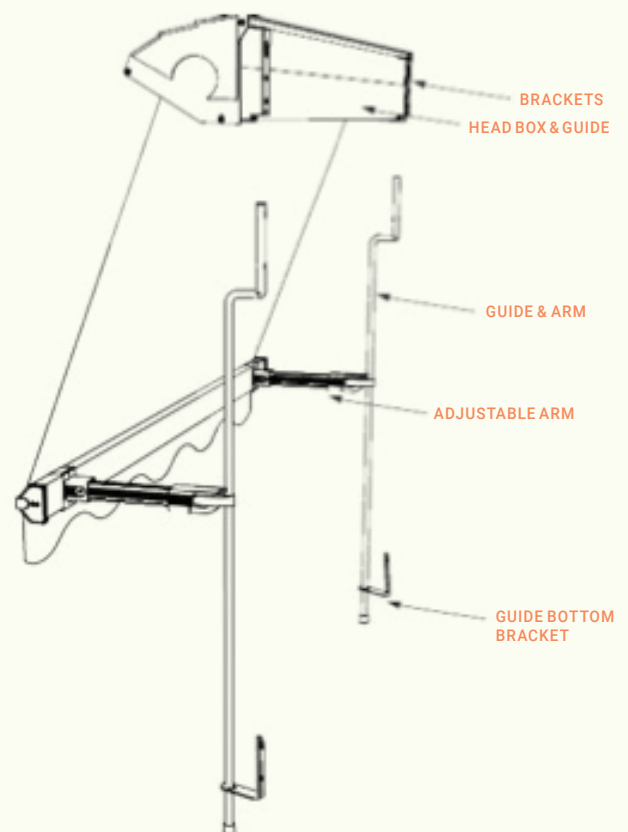


FLORENTINE

AWNINGS

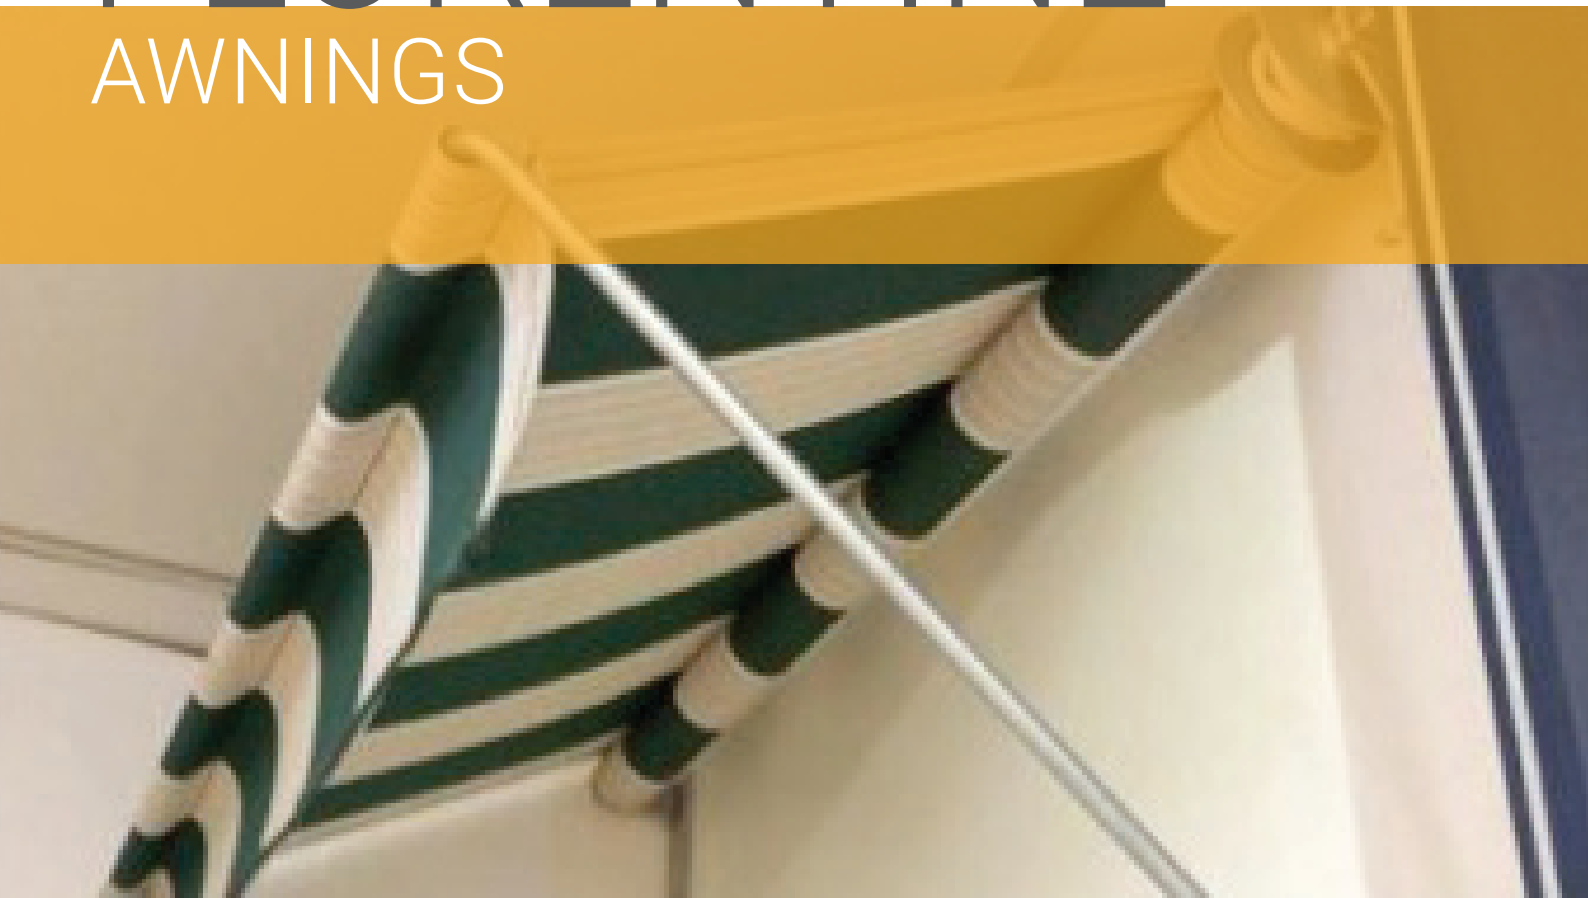

- Based on the Convertible Awning
- It has guide rails connected flush to the wall
- Pivot arms can be slid up and down the rails
- Ideal for doorways and balconies
- Available in Acrylic, Mesh, Canvas

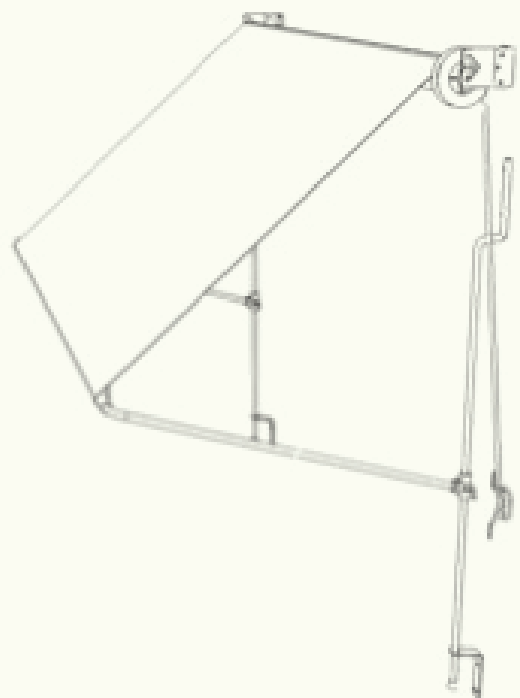

CONVERTIBLE AWNINGS



- Suitable for ground floor and upper level applications
- Hoods are available in a range of colours
- Operated either externally with crank, rope, tape, winch or internally with either tape or winch & motorisation with torque sensing technology
- Scalloped, straight or no valance options
- Standard five sided bottom rail. Incorporated spring-loaded arms
- Optional galvanised stand out arm
- Available in Canvas, Acrylic, Mesh



PRESTIGE DROP ARM AWNINGS


- Suitable for window & doors (with slide rails option)
- Comes complete with hood in White, Ebony & Precious Silver Pearl finish
- Front rail colours are White, Ebony & Precious Silver Pearl finish
- Arm & slide rail come in Clear Anodised (Silver in colour)
- Widths up to 4200mm
- Arm size / projection 500mm – 1500mm in 100mm increments
- Slide rail size / lengths 1000mm – 2000mm in 500mm increments
- Available with either gear/crank or motorized operation which can be coupled with sun & wind sensors for optimum control.
- When used with the optional slide rail (additional cost) this enables you to increase the height of the front rail, so giving a better height clearance (please note that this operation has to be done manually)
- Available in Acrylic, Mesh, Canvas



FLEXIFIT PIVOT ARM AWNINGS




- Versatile awning
 - Operated either internally or externally
 - Suitable for lower & upper levels
- Operated by rope, tape cord lock, crank, or motorised options.
- A three-sided head box allows mounting brackets to be positioned anywhere along the width, instead of at end of the awning (Recommended for cladded & fibro walls)
- Available with slide rail option this enables you to increase the height of the front rail for head clearance
- Available in Acrylic, Mesh, Canvas

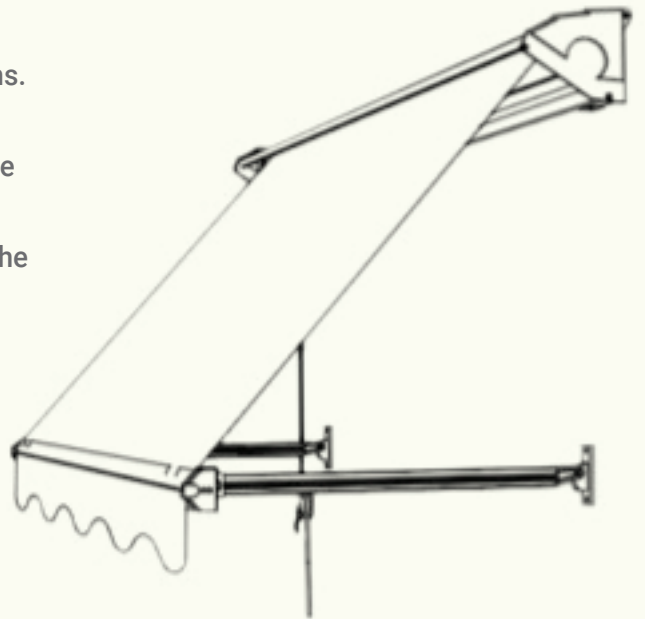

CASEMENT WINDOW AWNINGS



- Based on the Convertible style awning
- Double arm system
 - Stopped by chain attached to wall
 - Allows the height necessary for casement window to open outward
 - Then second set of arms extend the awning down past the window
- Available in Acrylic, Mesh, Canvas

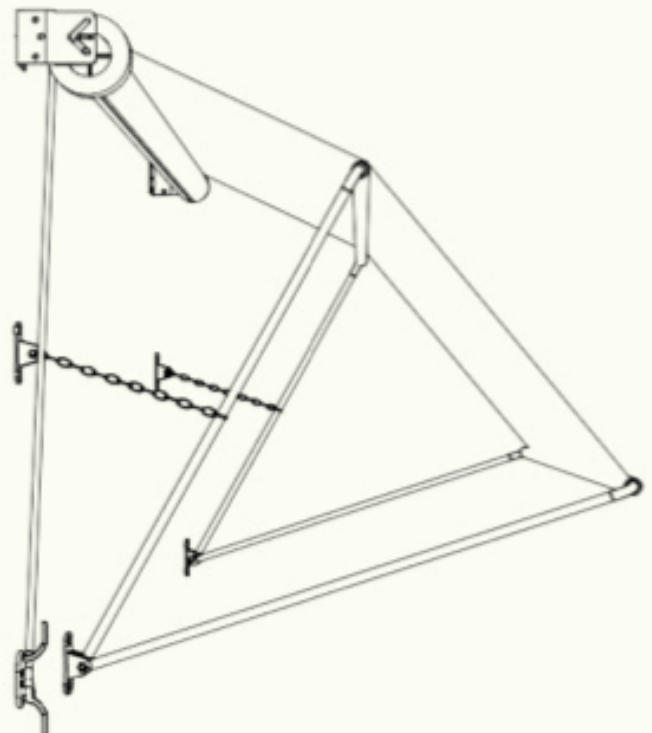

FOLDING ARM AWNINGS



- The perfect sun protection, retractable system for decks and outdoor entertaining areas
- Max width up to 16m
- Projection up to 4m
- When not required, the arms retract the fabric back onto the roller and out of the way
- Available as Standard or Semi Cassette which conceals the mechanism inside a headbox when retracted
- Standard operation is by crank (gear operation)
- Motorisation is available and can be linked with optional sun and wind sensors which will extend the Awning when sunny and retract the Awning when wind speed is excessive, giving complete peace of mind.
- Available in Acrylic

FIXED CAFE

AWNINGS



- Fixed Cafe Awnings are a fixed-weather protection fabric awning used for:



WINDOWS



SHOP FRONTS



DOORWAYS



PLAIN TRIM




SCALLOP TRIM

- Specifications

Max width: 6000mm

Max Projection: 1559mm with a fabric drop of 1800mm

- Available in Acrylic, Mesh, Canvas

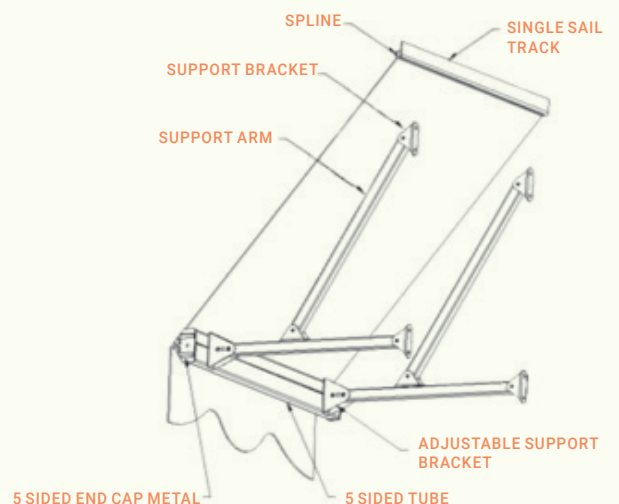

FIXED CANOPY AWNINGS



CUPOLACANOPY

DUTCH CANOPY

- Decorative awnings
- Great on southern & northern application sun & rain protection
- Over windows, doors & shopfronts
- Dutch canopy back frame height is normally the same size as the projection
- Cupolas projection is usually half the width size
- Business premises stand out from the crowd
- Fixed awning, aluminium rib sub-structure, covered in either fabric or PVC
- Available in Acrylic, Mesh, Canvas



DUTCH CANOPY

CUPOLA CANOPY

COLORBOND

STEEL AWNINGS



- Fixed Canopy Steel Awnings provide an attractive low-cost solution to the damage caused by Australia's harsh climate
- Produced from multi-rib cross-section Tru-steel panels, its rigid strength will provide greater wind resistance & protection against hail & storm damage
- Suitable for both domestic & commercial applications, Fixed Canopy Steel Awnings are available with either supporting arms or post supports. Which come with feet & 2500mm long as standard
- Projections over 1525mm must be supported by posts(max spacing between posts is 1500mm)
- Support arms will be cut at 150mm less than panel size unless otherwise specified. If a greater angle is required, the arms can be adjusted onsite to suit
- Please note Colorbond awnings can only be supplied WITHOUT sides
- Min Width 580mm • Max Width 6110mm • Min skin depth 760mm
- Max Projection 1800mm (Arm Mounted) • Max Projection 2100mm (Post Mounted) • Maximum area – 8m² • Panel Increments of 115mm
- Bullnose 150mm

Protect
door and windows
from **sun** and **rain**



Weather Protection



Solar Control



Available
Colours

CAULFIELD GREEN




EBONY




GULL GREY




HERITAGE RED




IRONBARK




MISTGREEN




MOUNTAIN BLUE




OFF WHITE



PEALE TERRACOTTA




SMOOTH CREAM




STONE




THREDBO WHITE



TUSCAN RED




WHEAT



STRAIGHT DROP CRANK



- Widths up to 5500mm
- Choice of Crank colours: Ebony or White
- Brackets available in: Ebony, White, Zincalume or stainless steel(surcharge applies)
- Standard bottom bar 50mm tube in pocket
- Specify either, end strap adaptor or strap cut out for bottom rail (You must specify distance in from each end)
- Valance option not available
- Crank handle available in: 1000mm, 1200mm, 1600mm, 1800mm, 2200mm
- Specify reverse or standard roll
- Motorisation available with torque sensing technology
- Available in Acrylic, Mesh, Canvas , Clear PVC

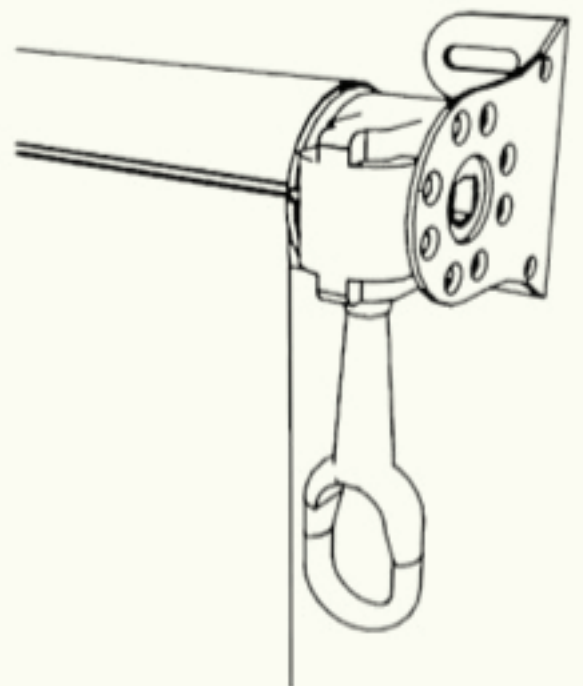

SPRING OPERATED STRAIGHT DROP



- Spring operated by hand
- Designed for short drops to hand rails up to 1800mm
- Ideal for balcony situations
- Max width 3500mm
- Snap hook to attach the bottom only
- Can only be recommended if roller & hand rail are level
- Should be cautious of application & who operates the blind (due to being a spring blind)
- Blind has no stops & must be fully up or locked down (45mm gap between rail & bottom)
- Available in Acrylic, Canvas, Mesh




STRAIGHT DROP ROLLER



- Easy to operate using rope with spool to raise & lower
- Standard bottom bar 50mm tube in pocket
- Specify either, end strap adaptor or strap cut out for bottom rail (You must specify distance in from each end)
- Valance option not available
- Specify reverse or standard roll
- Specify bracket type: Universal (rec), Tail, long out, ceiling, reveal fit

- Skin size 125mm smaller than awning width (85mm control size 40mm pin size when using tail, long out & reveal fix)
- Skin size 105mm smaller when using universal bracket & ceiling bracket
- Available in Acrylic, Mesh, Canvas , Clear PVC

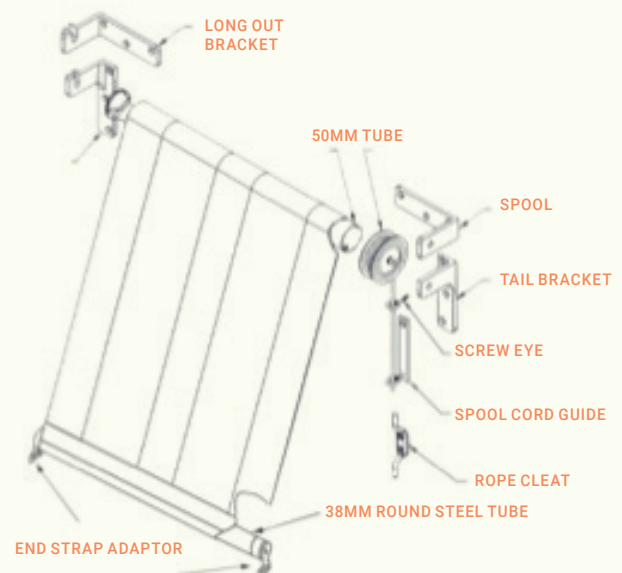


STRAIGHT DROP BATTEN



- The only awning that can be used in sloping situation
- Operated by rope only
- It rolls from the bottom up
- Timber batten inserted in a top pocket or sail track inserted in to top spline must specify to or face fix for both
- Zips / flaps & sail tracks are additional
- Available in Acrylic, Mesh, Canvas, Clear PVC




- If zips & flaps are included specify awning size including the flap & state flap size (default is 60mm & the smallest possible size)
- Must specify 'left', 'right' & 'left & right'
- 2 awnings can be zipped together (Please specify if required)
- Sail tracks must be specified whether fitted face or recess
- Sail track only available in silver
- Zip available in black or white

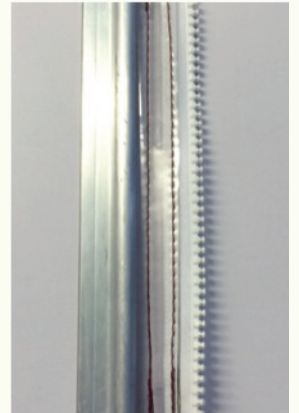

Strap Adapter Options



Strap with standard saddle Take off 100mm allowance




Strap with single snap hook & D saddle Take off 150mm allowance


ZIPPS/FLAPS




- If zips & flaps are included specify awning size including the flap & state flap size (default is 60mm & the smallest possible size)
- Must specify 'left', 'right' & 'left & right'
- 2 awnings can be zipped together (Please specify if required)
- Sail tracks must be specified whether fitted face or recess
- Sail track only available in silver
- Zip available in black or white

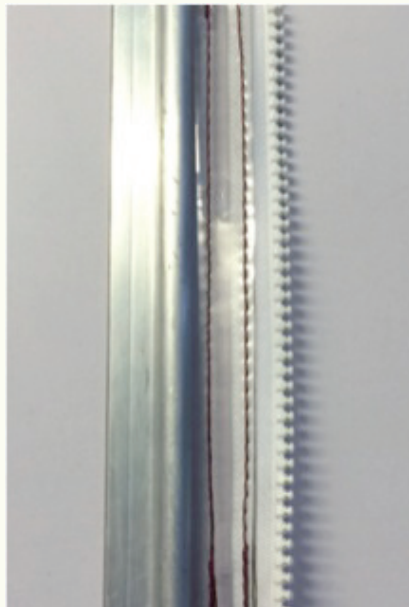

SHOP FRONT AWNINGS

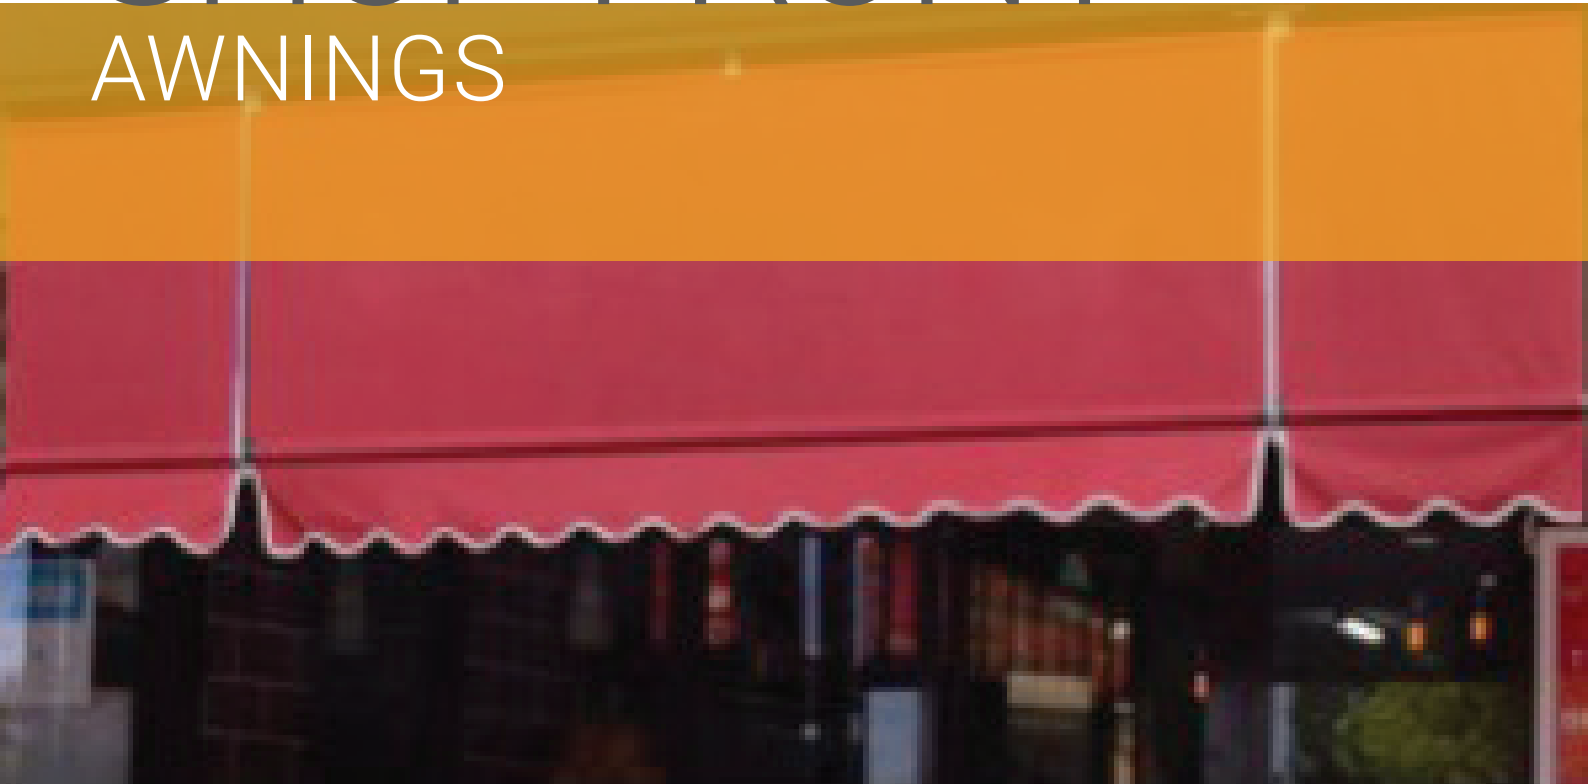


- J-hooks hung from shop awning(sizes are: 900mm, 1200mm, 1500m)
- Raise or lower manually with rope
- Straight, scallop or no valance(if valance required no J-hook positions)
- Customer to check council requirements
- The J-hooks hold the awning in place in the down position
- Shade to shopfront windows
- Company logos / product details can be sign-written (third party quotation)
- Available in Acrylic, Mesh, Canvas

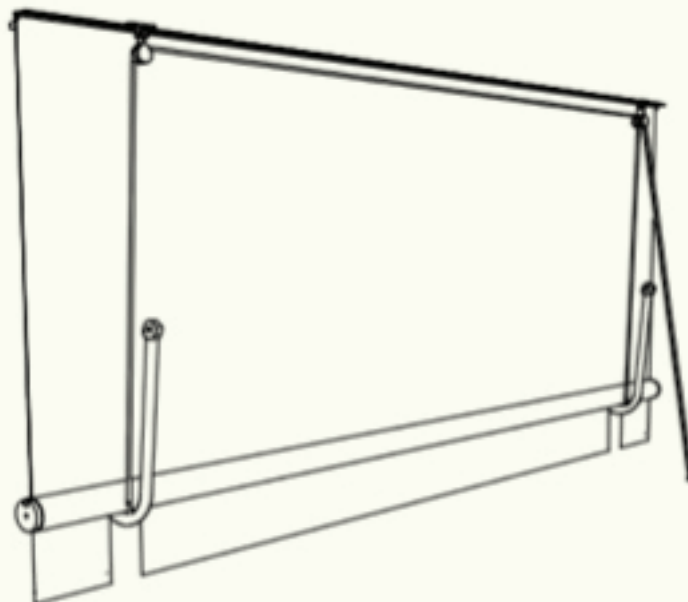

CHANNEL STOP AWNINGS




- Ideal for verandahs & decks
- Spring-operated top roller & side channels
- May be locked in preset positions
- Side channels available in Thredbo White, Off White, Smooth Cream, Wheat, Ebony & Mill finish (Powder coat additional charge)
- Fabric is not locked it to channels
 - can blow out in windy conditions
 - The side channels are there to hold the bottom rail in place & not the fabric.
- 30mm gap above roller to allow blind to be installed or removed from brackets
- Bottom leg may be fitted increasing bottom gap from 20mm to 40mm
- Top notch position may vary depending on the drop
- Available in Acrylic, Canvas , Mesh (not suitable for PVC)

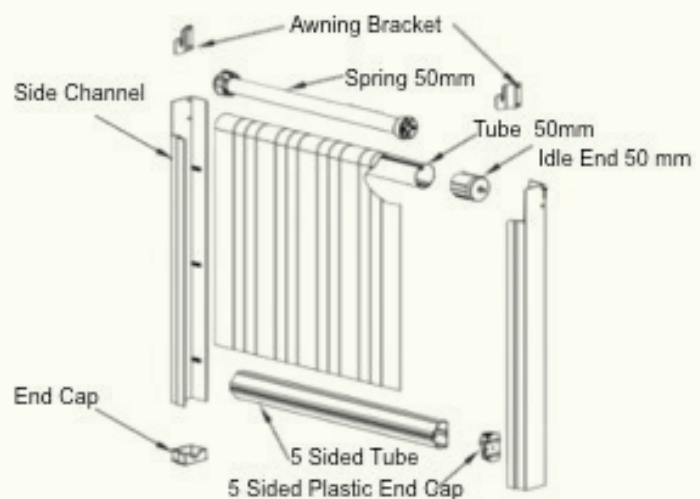


WIRE GUIDE

AWNINGS

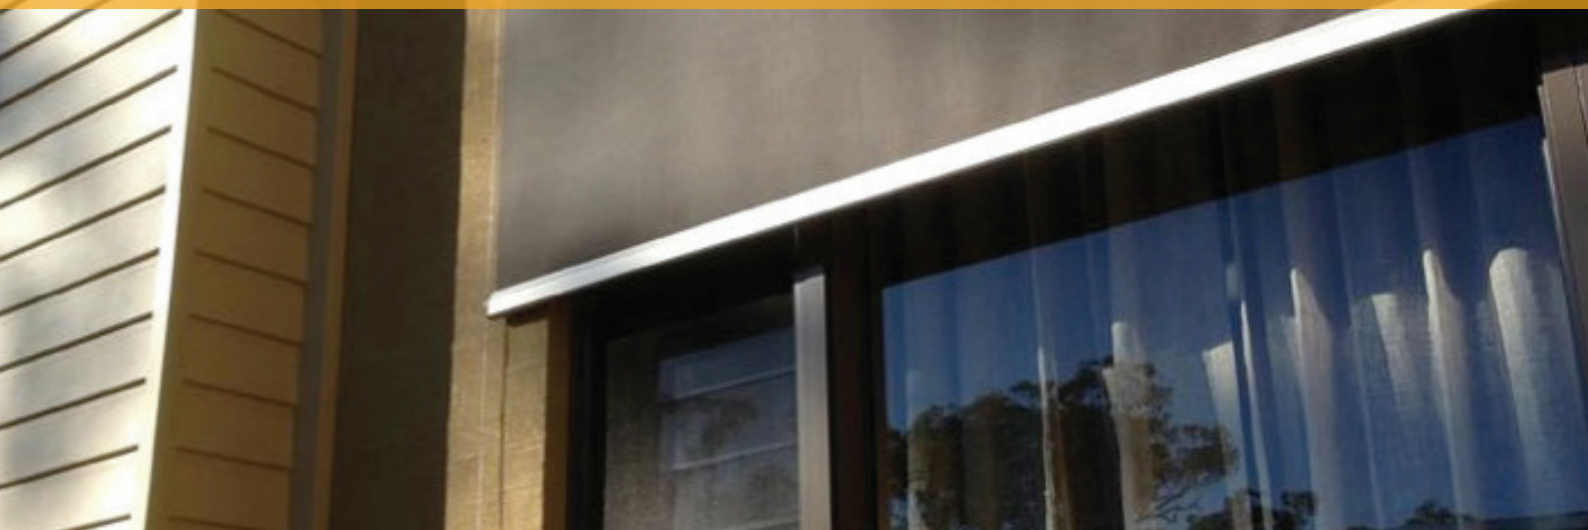

- Widths up to 5500mm
- Anodised aluminium base bar only
- Stainless steel tension wire guides: Close-fitting to move up & down on wire guide
- Can be crank operated or motorised
- Choice of crank colours: Ebony or White
- Brackets available in: Ebony, White, Zincalume or Stainless steel (surcharge applies)
- Crank handle available in: 1000mm, 1200mm, 1600mm, 1800mm, 2200mm
- Standard roll only
- Bottom rail tail down available for crank operated only (please specify)
- Available in Acrylic, Mesh, Canvas , Clear PVC

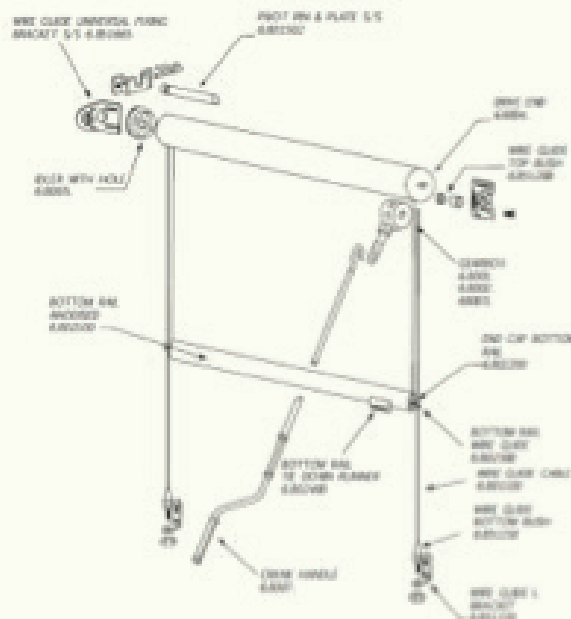

OPTIONS

MOTORISATION FOR WIRE GUIDE & STRAIGHT DROP AWNINGS

RS001 SOLAR SUN & WIND SENSOR

- Solar powered for simple installation
- Programmable with 5 wind speed & 9 light intensity settings
- Usable as sun & wind sensor where wind overrides sun
- Either the sun or wind sensor can be disabled if required
- For use with all WSER series motors & Alpha remote receivers

SPECIFICATIONS

- Frequency MHz 433.92
- Screen Type LED
- Power Requirements Solar only
- Number of Channels 1



RE302 (5 CHANNEL)

- 5 channel remote + all channels function
- Elegant design, with stainless steel trim on the edges
- 433.92 MHz
- Rolling codes
- LED channel selection
- Transparent magnetic wall holder

SPECIFICATIONS

- Frequency MHz 433.92
- Screen Type LED indicator
- Number of Channels 5 + all channels



OPTIONS

MOTORISATION FOR WIRE GUIDE & STRAIGHT DROP AWNINGS

RE301 (SINGLE CHANNEL)

- Single channel remote
- Elegant design, with stainless steel trim on the edges
- 433.92 MHz
- Rolling codes
- Transparent magnetic wall holder

SPECIFICATIONS

- Frequency MHz 433.92
- Number of Channels 1



WSER50 10/27 UNIVERSAL - MOTOR

- ELECTRONIC LIMIT SETTING, WITH BUILTIN REMOTE CONTROL RECEIVER
- 45mm diameter
- Power Specifications - 240V / 50Hz
- Electronic limns
- Built in Remote Receiver
- Wireless limit set up
- Suitable for: Most External Drop Blinds
- This motor is fast, quiet & perfect for when you want to be able to lock in & tension the blind. Our most popular motor for all types of external drop blinds. Lifts up to 17kg (bottom bar & skin)

SPECIFICATIONS

- Nominal Consumption (W) 203
- Lifting Capacity 17Kg on 6mm tube
- Rated Torque (Nm) 10
- Output Speed (rpm) 27
- Nominal Voltage (V) 240
- Nominal Current (A) 0.84
- Running Time (Min) 4
- Protection Index (Ip) 44
- Total Length (mm) 570
- Maximum Turns infinite
- Net Weight (Kg) 2.30



CARE & CLEANING

Do not expose fabric awnings to extreme weather conditions, they are designed to create shade. They should be rolled up in windy or stormy weather.

Keep the fabric clean by brushing both sides with a soft brush. Hosing on a hot day with cold water will minimise the development of algae, mildew and fungi by removing dust and grime.

Do not roll awnings away wet. However if bad weather requires this, roll them back out as soon as possible to prevent mould build up. Do not allow dirt, plant or bird droppings to remain in contact with the fabric.

Do not apply detergents, cleaning fluids or insecticides.

Occasionally extend awning fully down to even out the material, particularly if the awnings is usually set in the one position.

For stains, clean thoroughly with a non abrasive household cleaner (except for clear PVC) and rinse immediately with clean water and thoroughly dry. For clear PVC use a diluted solution of mild soap and water. Rinse with clean water and dry with a soft cloth or sponge.

Let Apollo Blinds open your mind to new decorator ideas. Since 1988 Apollo Blinds has focused on delivering the latest in home fashions with consistent reliable service. An Australian owned company with most products still being manufactured in Australia, Apollo Blinds gives you peace of mind – all fabrics and components come with a 2 year guarantee (1 year in home) on manufacture and materials*. Some materials or components may carry additional manufacturer's warranty*.

Call us 132 899 Visit apolloblinds.com.au Email sales@apolloblinds.com.au

HEAD OFFICE AND FACTORY

Sydney 172 Silverwater Road, (Corner Holker St) Silverwater NSW 2128

SHOWROOMS

Sydney 172 Silverwater Road, (Corner Holker St) Silverwater NSW 2128

Melbourne 439 Warrigal Road, Moorabbin VIC 3189

Brisbane Unit 1, 48 Kingston Road, Underwood QLD 4119

Newcastle 414 Pacific Highway, Belmont NSW 2280

Canberra Unit 1, 6 Wiluna Street, Fyshwick ACT 2609

Port Macquarie 6/1 Blackbutt Road, Port Macquarie NSW 2444

Coffs Harbour 3/12 Isles Drive, North Boambee Valley NSW 2450

Wollongong 210 Princes Highway, Albion Park Rail NSW 2527

Tamworth Shop 3, 164 Peel Street, Tamworth NSW 2340

MOBILE SHOWROOMS

Armidale, Ballina, Dubbo, Gold Coast, Orange, Sunshine Coast, Wagga Wagga



MANUFACTURED
IN AUSTRALIA



MANUFACTURED
OVERSEAS

*The information and products in this brochure are correct as at 1st July 2018 but may vary after this date. Not all products may be available at all outlets. *Some conditions apply.*

